


MODEL SPECS

INTERFACES

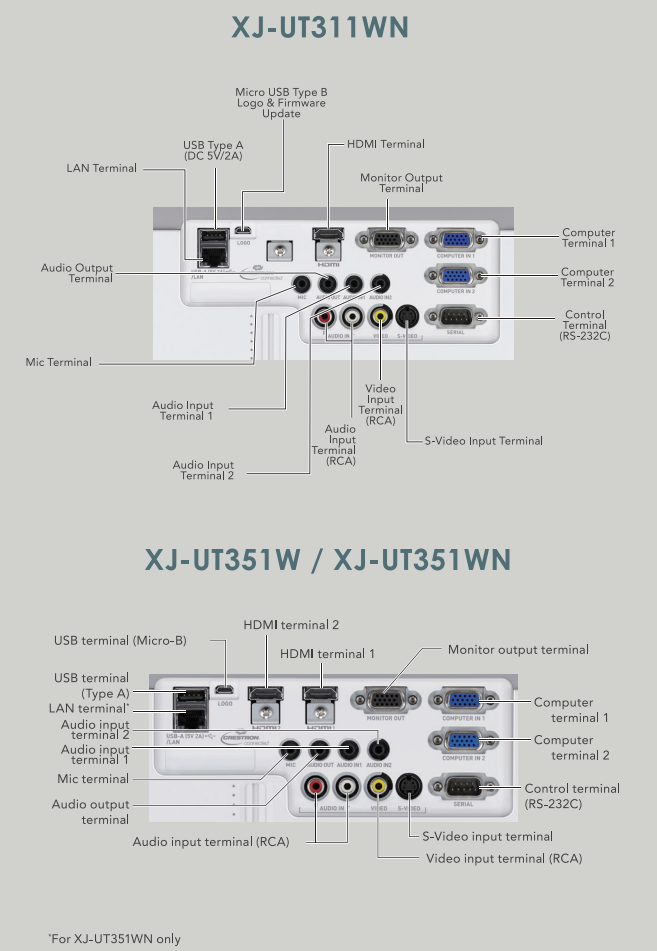

ACCESSORIES INCLUDED WITH PRODUCT:

Power Cable

IR Remote Control
YT-131 for XJ-UT311WN / XJ-UT351WN
YT-160 for XJ-UT351W

Quick Guide

Warranty Card

RGB Cable
Only for XJ-UT311WN

Wireless Dongle (YW-40)
Only for XJ-UT311WN & XJ-UT351WN

Mounting Bracket
(Optional YM-80/81)

Function		Ultra Short Throw Model		
		XJ-UT311WN	XJ-UT351W	XJ-UT351WN
Brightness (lumens)		3100 Lumens	3500 Lumens	
Display System		DLP® chip × 1, DLP® system		
Display Chip		WXGA 0.65 inches(Aspect ratio: 16:10) 1,024,000 pixels(1280 × 800)		
Contrast Ratio (Full White / Black)		20,000 : 1		
Keystone Correction		Vertical & Horizontal Keystone ±5°		
Focus Type		Fixed zoom, manual focus		
Projection Lens		Fixed Lens F2.3/4.2(@60°)		
Projected Image Size		50 to 110 inches		
Throw Ratio		0.28 : 1		
Projection Distance	60-inch	0.13 m (0.4 ft)		
	100-inch	0.40 m (1.3 ft)		
	Minimum Projection Distance	0.06 m (0.2 ft)		
Light source (estimated life)		Laser & LED (up to 20,000 hours)		
Colour Production		Full color (up to 1.07 billion colors)		
Scanning Frequencies	Horizontal	15 to 91 kHz		
	Vertical	50 to 85Hz		
Analog Signal	Native	WXGA (1280x800)		
	Maximum	WUXGA (1920 × 1200)		
	Input Terminal	RGB 15-pin mini D-Sub × 2		
	Monitor Out	RGB 15-pin mini D-Sub × 1		
	Video Signal	Composite (RCA) terminal × 1 S-video terminal × 1		
	Display Resolution	NTSC/PAL/PAL-N/PAL-M/PAL60/SECAM		
Digital Signal	Display Resolution (Maximum)	WUXGA (1920 x 1200)		
	Input Terminal	HDMI type A x 1 (HDCP)	HDMI type A x 2 (HDCP)	
Audio	Input Terminal	RCA R/L terminals x1	3.5mm stereo mini jack x 2	
	Output Terminal	3.5mm stereo mini jack x 1		
	Speaker	16W x 1, Monaural		
Other Terminals	USB Host	USB Type A (DC 5V/2A) x 1	USB Type A (DC 5V/2A) x 1 * For Power Supply Only	USB Type A (DC 5V/2A) x 1
	USB Display Supported Playback	Yes JPG/BMP/PNG /MP4/AVI/MOV	No	Yes JPG/BMP/PNG /MP4/AVI/MOV
	Control Terminal	RS-232C (D-Sub 9 pin) x 1		
	LAN (RJ45)	Yes	No	Yes
	Micro USB Type B	Yes For Logo Data Registration & Firmware Update		
	Remote ID Function	Yes Up to 4 IDs		
Wireless LAN Support		Yes YW-40 Included	No	Yes YW-40 Optional
Power Requirement		100 to 240V AC, 50/60Hz		
	Operating (default setting) Light Output 7	160w	185w	
	Operating (default setting) Light Output 1	90w	105w	
	Bright Mode	195w	225w	
	Standby (100V to 120V)	0.12w		
	Standby (220V to 240V)	0.23w		
Internal Memory Storage		No		
Noise Level		28dB(Eco Mode) 37dB (Normal Mode)		
Dimension (W x H x D)	Projector Only	338 x 153 x 333		
	Projector with Cable Cover	413 x 153 x 333		
Weight		5.7kg		
Security Features		Kensington Lock, Security Bar, Power On Password		
Bundled Accessories		Wireless Remote Control (YT-131)	Wireless Remote Control (YT-160)	Wireless Remote Control (YT-131)
		AC Power Cord	AC Power Cord	
		Warranty Card	Warranty Card	
		Quick Guide	Quick Guide	
		RGB Cable	-	
	Wireless Dongle (YW-40)	-		

CASIO®
PROJECTORS



ENHANCE TEACHING
IN COMPACT SPACES

ULTRA SHORT THROW Series
XJ-UT311W XJ-UT351W XJ-UT351WN
*Models availability subjected to countries.



*Actual worldwide sales (2010 ~ 2015) Solid State Illumination Light Source projectors rated at of 2,500 lumens or higher. Source: Futuresource Consulting Ptd.

ULTRA SHORT THROW Series




Projects 60-inch images from distances as short as 13 cm. Suitable for a variety of spaces, from classrooms to conference halls.

C-ASSIST FOR ENHANCED CLASSROOM TEACHING EXPERIENCE



Teachers no longer have to station themselves at the front of the classroom with CASIO's dedicated software – C-Assist. The application allows the presenter to control the projection from a smartphone or tablet from anywhere in the classroom and have the autonomy to teach while walking about.

LARGE SCREEN PROJECTION FROM SHORT DISTANCES

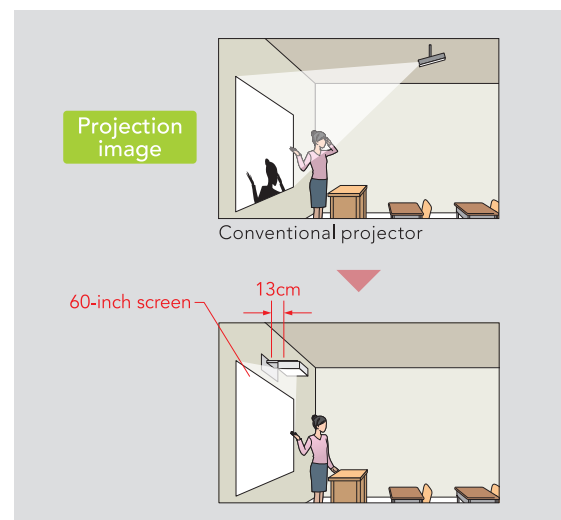

The Ultra Short Throw series has a remarkable short-focus lens that presents 60-inch screen size from a mere distance of 13cm. The short throw eliminate shadows that often appear on-screen and keeps the light from the light source away from the presenter's eyes.

2X DIGITAL ZOOM

Even though the Ultra Short Throw projector can project images from a short distance away from the screen, it does have a 2x zoom function to boost magnification.


VERTICAL AND HORIZONTAL KEYSTONE

Distortion of images can be now corrected using our Vertical & Horizontal keystone correction function.

VERTICAL KEYSTONE



HORIZONTAL KEYSTONE

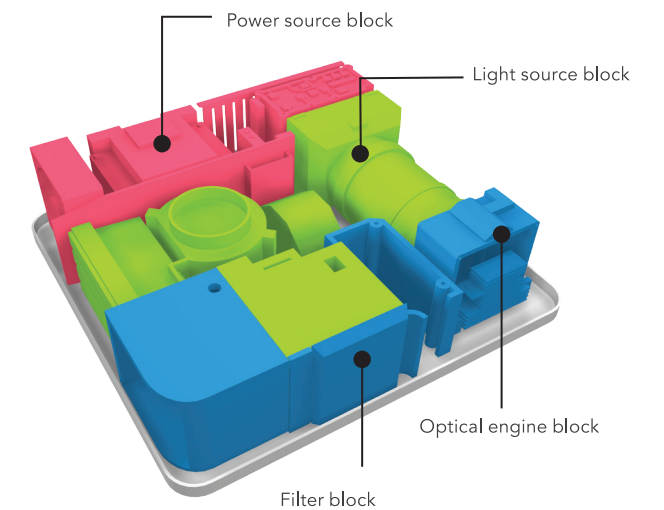


DUST RESISTANCE STRUCTURE

The Ultra Short Throw Series projector is built to suppress dust intrusion to ensure optimum performance while reducing labour required for periodic cleaning as well as prevent colour degradation.

VERSATILE PROJECTION

You can project images or more right from the desktop, or choose to mount the Ultra Short Throw projector on the ceiling with a specially designed mount. *YM-80/81 purchase separately

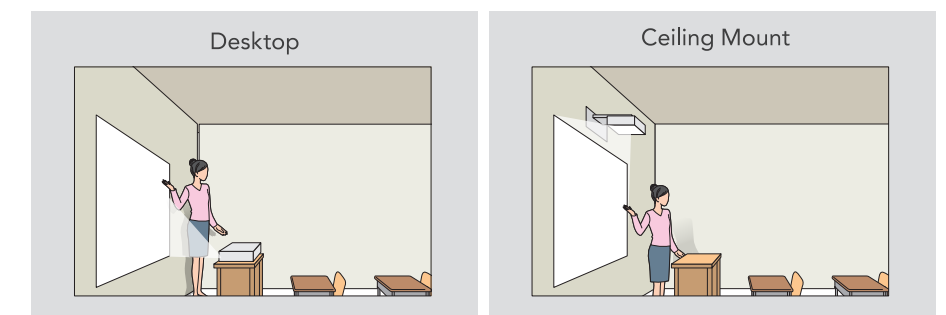

ID REMOTE FUNCTION

ID Remote function allows you to control 4 different projectors using a single remote control. Projectors will now only act upon your command.

